

Silicon PNP Power Transistors

2SB1223

DESCRIPTION

- With TO-220F package
- Complement to type 2SD1825
- High DC current gain.
- Large current capacity and wide ASO.
- DARLINGTON

APPLICATIONS

- Suitable for use in control of motor drivers, printer hammer drivers, and constant-voltage regulators.

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

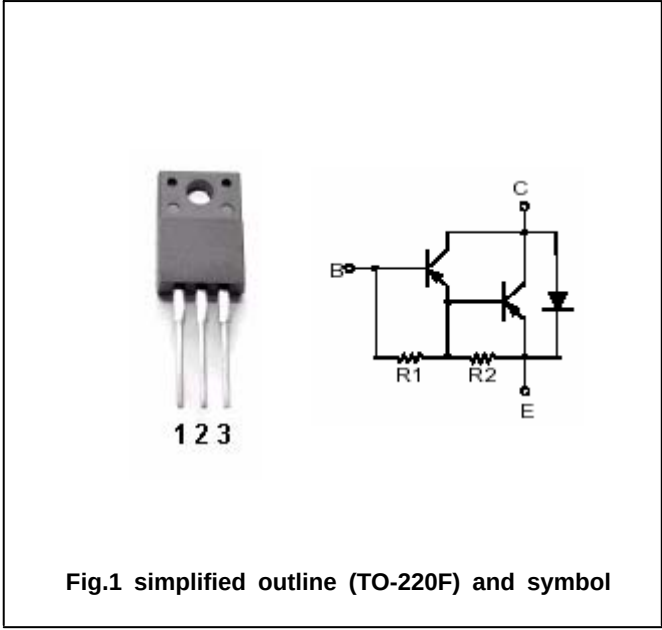


Fig.1 simplified outline (TO-220F) and symbol

Absolute maximum ratings (Ta=25°C)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	-70	V
V_{CEO}	Collector-emitter voltage	Open base	-60	V
V_{EBO}	Emitter-base voltage	Open collector	-6	V
I_C	Collector current		-4	A
I_{CM}	Collector current-peak		-6	A
P_C	Collector dissipation	$T_C=25^{\circ}C$	20	W
		$T_a=25$	2	
T_j	Junction temperature		150	$^{\circ}C$
T_{stg}	Storage temperature		-55~150	$^{\circ}C$

Silicon PNP Power Transistors

2SB1223

CHARACTERISTICS

Tj=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=-5mA; I_E=0$	-70			V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=-50mA; R_{BE}=\infty$	-60			V
V_{CEsat}	Collector-emitter saturation voltage	$I_C=-2A; I_B=-4mA$		-1.0	-1.5	V
V_{BEsat}	Base-emitter saturation voltage	$I_C=-2A; I_B=-4mA$			-2.0	V
I_{CBO}	Collector cut-off current	$V_{CB}=-40V; I_E=0$			-0.1	mA
I_{EBO}	Emitter cut-off current	$V_{EB}=-5V; I_C=0$			-3.0	mA
h_{FE}	DC current gain	$I_C=-2A; V_{CE}=-2V$	2000	5000		
f_T	Transition frequency	$I_C=-2A; V_{CE}=-5V$		20		MHz

Switching times

t_{on}	Turn-on time	$I_C=500I_{B1}=-500I_{B2}=-2A$ $V_{CC}=-20V, R_L=10\Omega$		0.5		μs
t_{stg}	Storage time			1.4		μs
t_f	Fall time			1.2		μs

Silicon PNP Power Transistors

2SB1223

PACKAGE OUTLINE

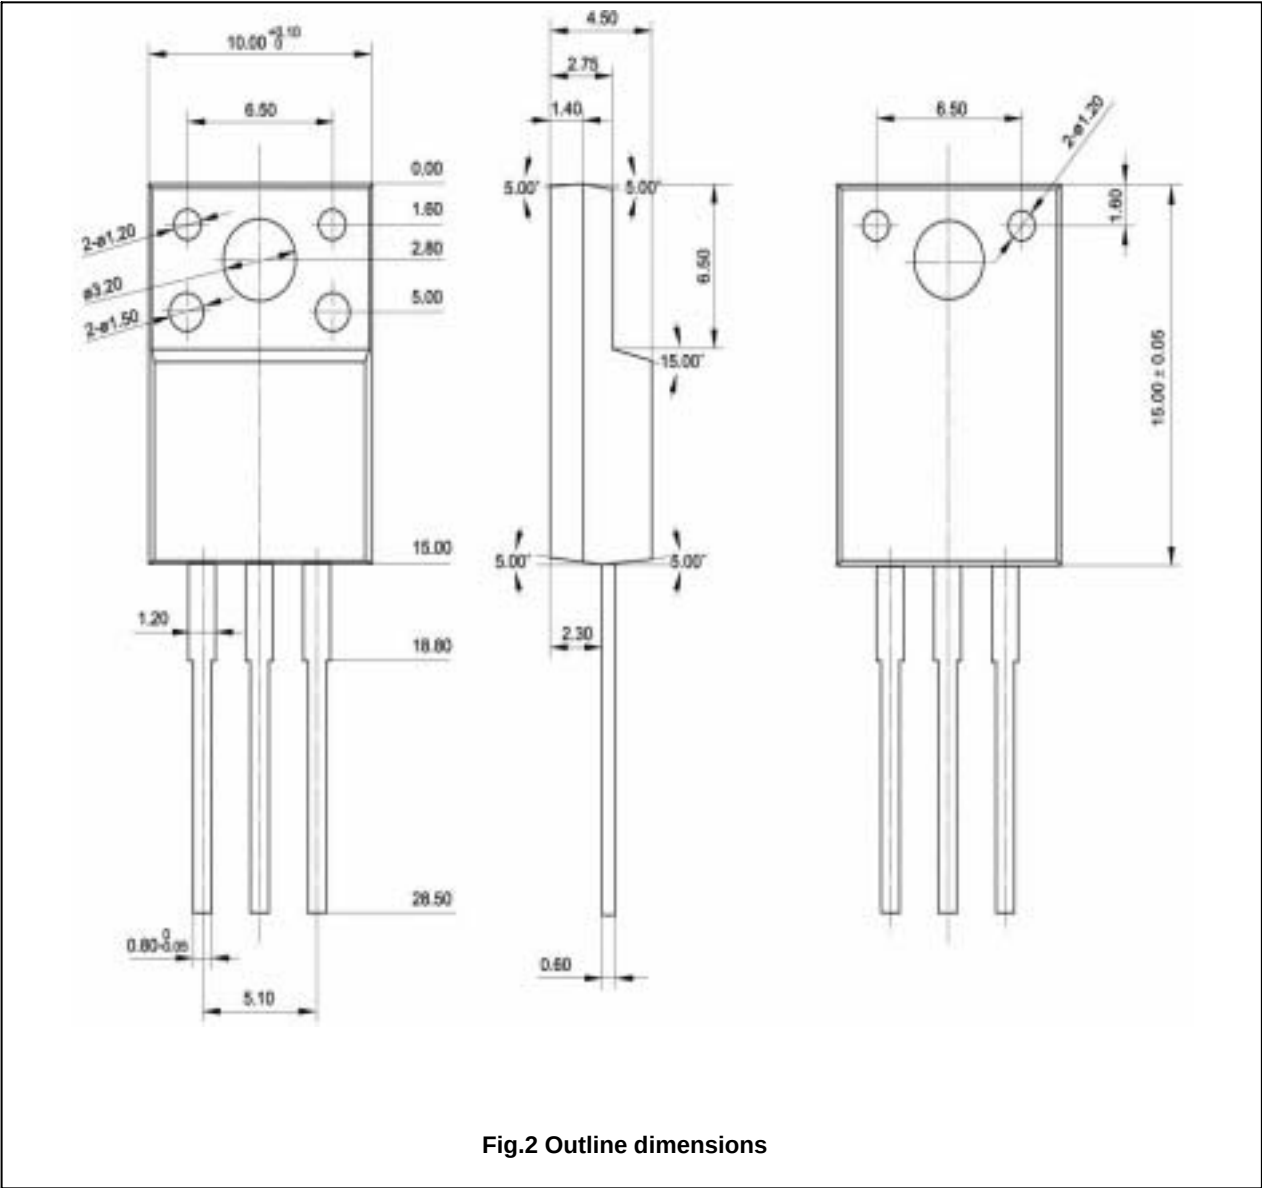


Fig.2 Outline dimensions