

Silicon NPN Power Transistors

2SC2768

DESCRIPTION


- With TO-220C package
- High speed switching
- High reliability

APPLICATIONS

- Switching regulators
- Ultrasonic generators
- High frequency inverters
- General purpose power amplifiers

PINNING

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter

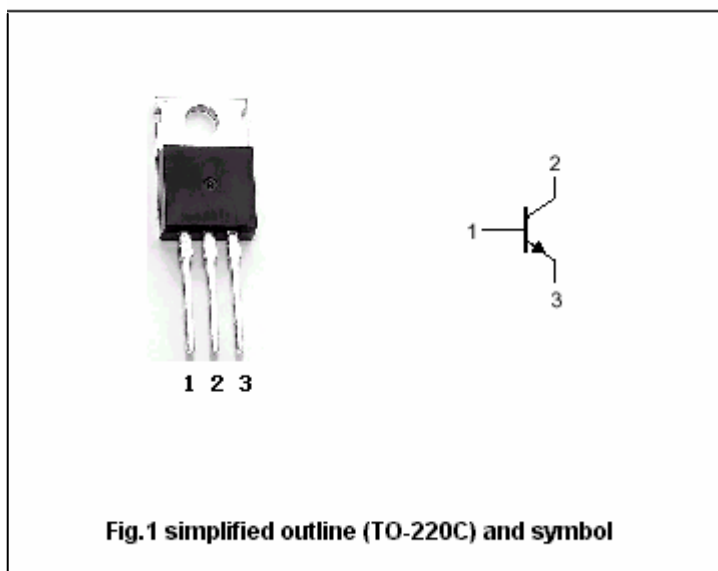Absolute maximum ratings($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	250	V
V_{CEO}	Collector-emitter voltage	Open base	200	V
V_{EBO}	Emitter-base voltage	Open collector	7	V
I_C	Collector current		6	A
I_B	Base current		1.5	A
P_C	Collector power dissipation	$T_C=25$	40	W
T_j	Junction temperature		150	
T_{stg}	Storage temperature		-55~150	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-C}$	Thermal resistance junction case	3.0	/W

Silicon NPN Power Transistors

2SC2768

CHARACTERISTICS

T_j=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	I _C =10mA ; I _B =0	200			V
V _{(BR)CBO}	Collector-base breakdown voltage	I _C =100 μ A ; I _E =0	250			V
V _{(BR)EBO}	Emitter-base breakdown voltage	I _E =100 μ A ; I _C =0	7			V
V _{CEsat}	Collector-emitter saturation voltage	I _C =2A; I _B =0.8A			0.5	V
V _{BEsat}	Base-emitter saturation voltage	I _C =2A; I _B =0.8A			1.2	V
I _{CBO}	Collector cut-off current	V _{CB} =250V ; I _E =0			100	μ A
I _{EBO}	Emitter cut-off current	V _{EB} =7V; I _C =0			100	μ A
h _{FE}	DC current gain	I _C =1A ; V _{CE} =5V	20			

Switching times

t _{on}	Turn-on time	I _C =4A; I _{B1} =-I _{B2} =-0.4A R _L =20Ω			1.0	μ s
t _{stg}	Storage time				2.0	μ s
t _f	Fall time				1.0	μ s

Silicon NPN Power Transistors

2SC2768

PACKAGE OUTLINE



Fig.2 Outline dimensions (unindicated tolerance: ± 0.10 mm)

Silicon NPN Power Transistors

2SC2768

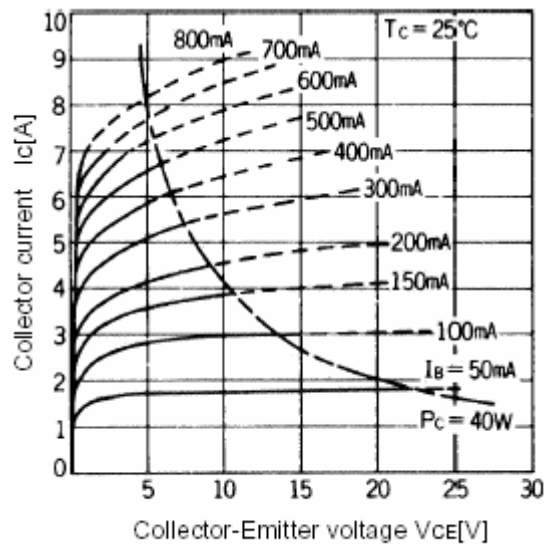


Fig.3 Static Characteristic

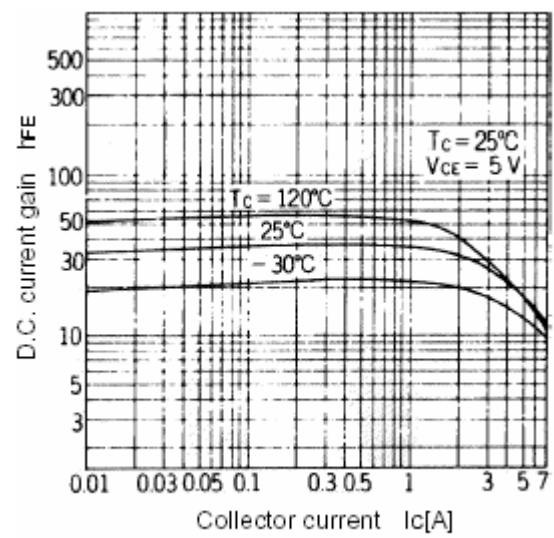


Fig.4 DC current Gain

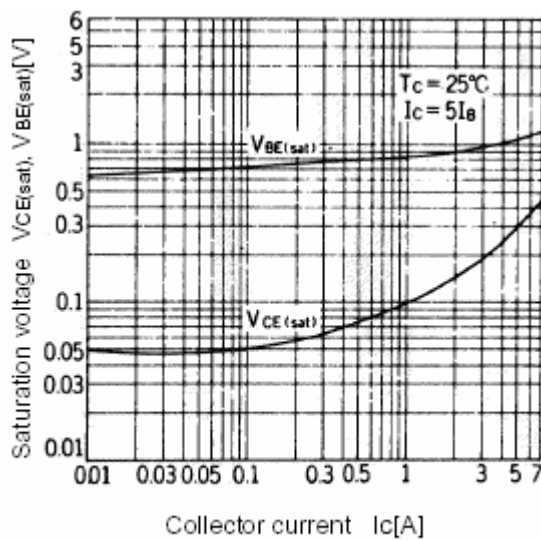
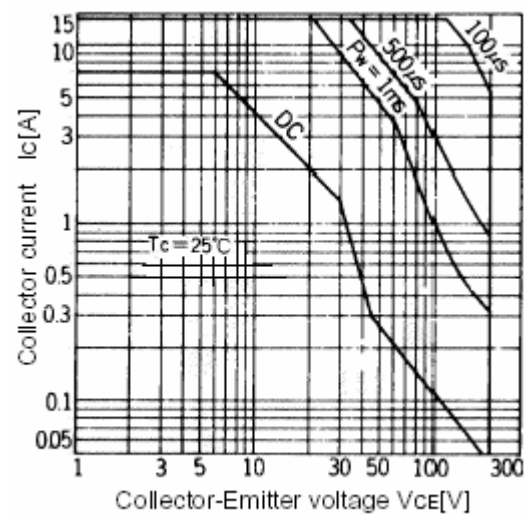
Fig.5 Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

Fig.6 Safe Operating Area